

# RF AMPLIFIER

## MODEL *TM6442*

Available as: TM6442, 4 Pin TO-8 (T4)  
 TN6442, 4 Pin Surface Mount (SM3)  
 FP6442, 4 Pin Flatpack (FP4)  
 BX6442, Connectorized Housing (H1)

### Features

- High Output Power: +22 dBm Typical
- High IP3: +37 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

### Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	20 - 400 MHz	20 - 400 MHz
Gain (dB)	14	12.5 Min
Power @ 1 dB Comp. (dBm)	+22	+19.0 Min.
Reverse Isolation (dB)	-19	-17 Max.
VSWR In	1.15:1	2.0:1 Max.
Out	1.25:1	2.0:1 Max.
Noise figure (dB)	4.5	6.0 Max.
Power Vdc	+15	+15
mA	62	65 Max.

Note: Care should always be taken to effectively ground the case of each unit.


### Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point ..... +57 dBm (Typ.)  
 Second Order Two Tone Intercept Point ..... +51 dBm (Typ.)  
 Third Order Two Tone Intercept Point ..... +37 dBm (Typ.)

### Maximum Ratings

Ambient Operating Temperature ..... -55°C to + 100 °C  
 Storage Temperature ..... -62°C to + 125 °C  
 Case Temperature ..... + 125 °C  
 DC Voltage ..... + 18 Volts  
 Continuous RF Input Power ..... + 18 dBm  
 Short Term RF Input Power..... 50 Milliwatts 1 Minute Max.)  
 Maximum Peak Power ..... 0.5 Watt (3 µsec Max.)

### Typical Performance Data

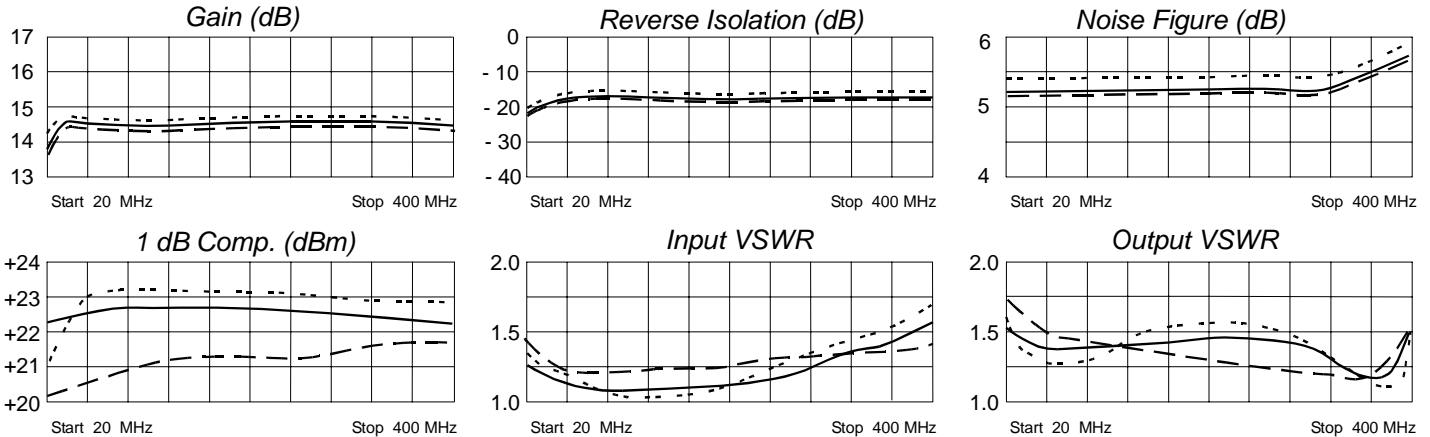

Legend ——— + 25 °C    - - - - + 85 °C    ······ -55 °C

### Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.13	-115	5.08	-173	.10	10	.23	153
50	.08	-168	5.23	161	.10	- 6	.16	177
100	.06	-170	5.19	138	.10	- 18	.16	-171
200	.07	-123	5.07	93	.11	- 39	.18	-169
300	.15	-155	5.04	45	.11	- 66	.11	159
400	.22	97	4.82	- 16	.12	-108	.12	- 14



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 05/11/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001